

DATASHEET DS-DSP-10

GRP STEP-OVERS AND ACCESS PLATFORMS

GRP grating and pultruded profiles have an impressive strength to weight ratio and replaces traditional materials like galvanised steel and aluminium fabrications. All fabrications are manufactured to individual requirements but to the relevant British Standards unless requested otherwise.



Including, structural framework, 800x270mm treads with hi-viz (high visibility) nosing and hand railing both sides. Fabrications can be supplied fully or part assembled and Decksafe can also install for you with one of our fully trained installation teams if required. For bespoke requirements we can conduct site surveys to measure up and recommend the best solution for your needs.

BENEFITS

- ✓ Anti-slip
- ✓ Light Weight
- ✓ Low Maintenance
- ✓ Anti-static
- ✓ Non Conductive
- ✓ uV stable
- ✓ Corrosion Resistant
- ✓ Bespoke Design

DATASHEET DS-DSP-10


GRP STEP-OVERS AND ACCESS PLATFORMS

Typical Layout Guidelines:

1m wide x 0.5m high

1.5m wide x 0.75m high

2m wide x 1m high

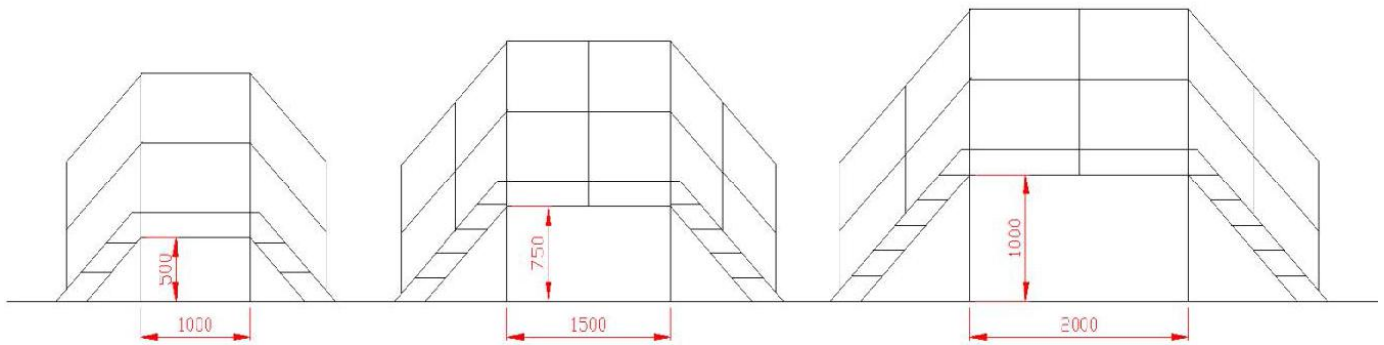

MATERIAL CHARACTERISTICS



Quality Assurance

Manufactured in accordance with our ISO 9001 accredited Quality Management System, the structural integrity of the specified material is high grade. A suggested life span of 25 years is expected, but not guaranteed, and is based on a number of variables: environmental, installation process, maintenance, loading and traffic conditions.



Light Weight and Durable.

Weighing around 1/3 of an alternative steel grating, Quartzgrip® moulded fibreglass grating is lightweight in comparison, and can be manoeuvred into place without mechanical assistance.

Quartzgrip® Moulded Grating is exceptionally durable, and has the ability to withstand impact, reducing the risk of permanent buckling and deformation.



Slip Resistance

The integral angular quartz gritted surface has been Tested in accordance with BS7976-2 and provides an exceptional level of slip resistance. Lifespan depends on frequency of use.



Fire Resistance

All products contain a fire resistant additive and comply with Euro Class 1 and ISO11952-2. Performance is equivalent to ASTM E84 class 1 and BS476 part 7 class 2 flame spread to give a 30 minute burn time.



UV Stable

All panels are manufactured with a high quality UV inhibitor to prevent colour degradation.

FOR MORE INFO

Call: 01206 322 899

Email: sales@deck-safe.co.uk

Visit: www.decksafe.co.uk

V4-25.01.2019

DATASHEET DS-DSP-10



GRP STEP-OVERS AND ACCESS PLATFORMS

Related Products



Access Ladders



Machine Guard



Grating



Handrails

FOR MORE INFO

Call: 01206 322 899

Email: sales@deck-safe.co.uk

Visit: www.decksafe.co.uk

V4-25.01.2019

