

## GRP DECKING STRIPS



## BENEFITS

- ✓ Anti-slip.
- ✓ High strength.
- ✓ Low maintenance.
- ✓ Fire retardant.
- ✓ Corrosive resistant.
- ✓ uV stable.
- ✓ Chemical resistant.
- ✓ Non-Conductive

The Quartzgrip® DDA compliant range of Anti-slip Safety Products includes Convex Decking Strips. All are manufactured from corrosion resistant Glass Reinforced Plastic (Fibreglass) and have been designed for easy installation onto existing timber decking. We strongly suggest you glue and screw this product in place.

## GRP DECKING STRIPS

A hard-wearing Silicon Carbide Grit is applied to the top surface to provide an effective anti-slip finish, which outperforms conventional aluminium or rubber material in terms of slip resistance.

- Designed to fit directly onto existing timber decking.
- Unique chamfered edge ensures a low profile fit, reducing the trip hazard.
- Decking Strips are available in 50mm and 100mm widths.
- Pre-Drilling and countersinking of fixing holes available.
- Available as a convex 'Fiton' or flat 'Infil' option

Sizes	Weight/KG	Colours Available
3000 x 50mm	1	Black, Beige, Yellow, Brown, Green & Grey
3600 x 50mm	1.2	
3000 x 100mm	2	

## MATERIAL CHARACTERISTICS



### Quality Assurance

Manufactured in accordance with our ISO 9001 accredited Quality Management System, the structural integrity of the specified material is high grade. A suggested life span of 25 years is expected, but not guaranteed, and is based on a number of variables: environmental, installation process, maintenance, loading and traffic conditions.



### Chemical Resistance

GRP is resistant to a wide range of chemicals, across a wide temperature spectrum. GRP can be made using different resin systems to achieve specific chemical resistant properties. Please refer to our separate chemical resistance charts SOS-DST-10.



### Slip Resistance

The integral angular quartz gritted surface has been Tested in accordance with BS7976-2 and provides an exceptional level of slip resistance. Lifespan depends on frequency of use.



### Fire Resistance

All products contain a fire resistant additive and comply with Euro Class 1 and ISO11952-2. Performance is equivalent to ASTM E84 class 1 and BS476 part 7 class 2 flame spread to give a 30 minute burn time.

## FOR MORE INFO

Call: 01206 322 899

Email: [sales@deck-safe.co.uk](mailto:sales@deck-safe.co.uk)


Visit: [www.decksafe.co.uk](http://www.decksafe.co.uk)

V3-25.01.2019




## GRP DECKING STRIPS

### Related Products

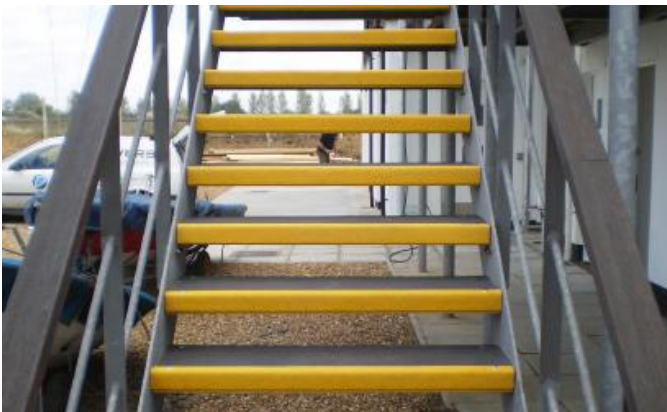

Stair Tread Covers

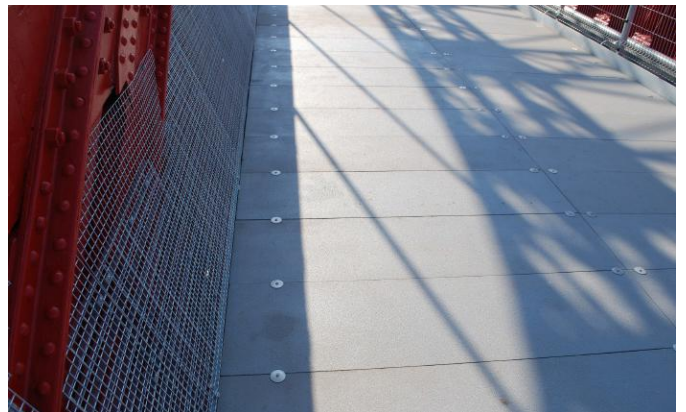

Flat Plate



GRP Handrail



Stair Nosing



Fibreglass Open Mesh Grating



Stairs

### FOR MORE INFO

Call: 01206 322 899

Email: [sales@deck-safe.co.uk](mailto:sales@deck-safe.co.uk)

Visit: [www.decksafe.co.uk](http://www.decksafe.co.uk)

V3-25.01.2019